


The TA-1114, ideally suited for applications where a discriminating look makes a difference. An attractive package which looks great outside the Board Room or at the front gate in the rain or snow.


The TA-1114 proximity reader from AWID offers a stylish look and a superior read range of 6-8 inches. It is designed to mount on a standard-single-gang electric wall box or on the surface of an interior or exterior wall. TA-1114 comes in dark gray or beige and is sure to blend in with the architectural design of any building. It is easily installed and the two piece construction allows switching of covers to accommodate color changes.


The Switch Plate proximity reader outputs Wiegand or RS232 formats and is compatible with all access control systems. The electronics is potted with UL-approved potting compound which protects the reader from harsh environmental conditions. It is manufactured in an ISO 9000 certified facility providing for the highest quality standard. The SP is highly reliable, warranted for life and capable of providing the best read range in its class.

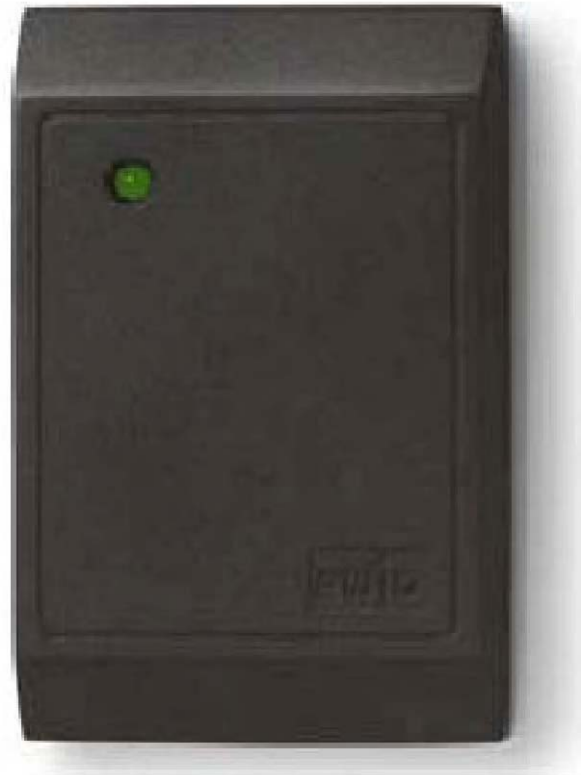

Features

- Read range of 6-8 inches
- Electronics potted with epoxy compound for weather resistance
- LED for visual feedback, Piezo for audio feedback
- Industry standard Wiegand or RS-232 output
- Proximity technology, no contact required
- Attractive high-tech look enclosure
- Indoor and outdoor application

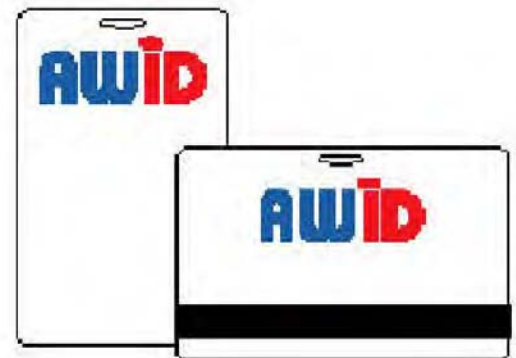

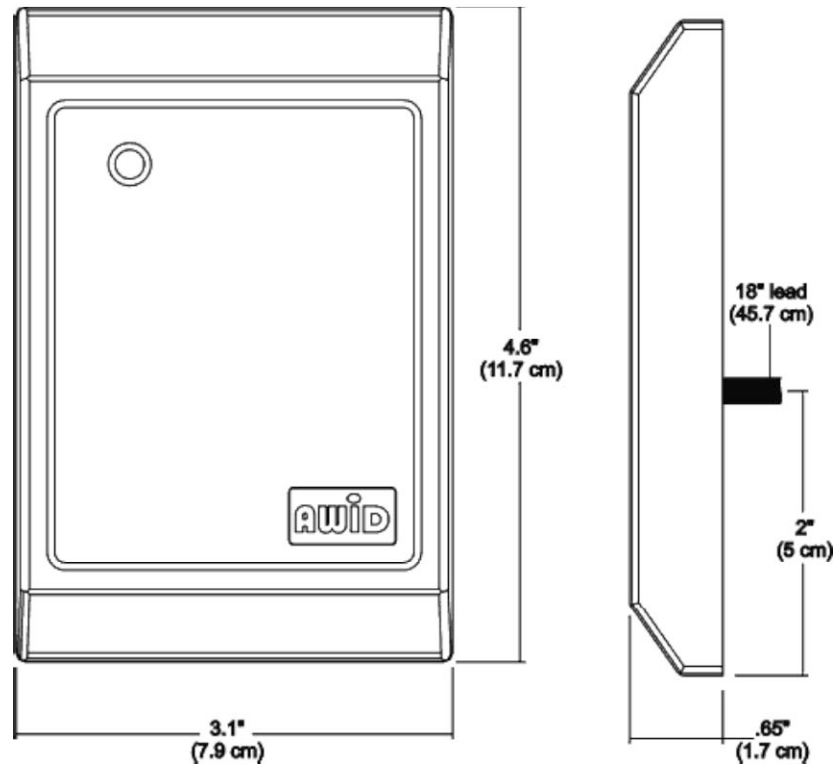

Specifications

- | | |
|---|---|
| <ul style="list-style-type: none"> • Read Range:
6-8" (15.2-20.3cm) • Transmitting Frequency:
125kHz • Voltage:
5-12 VDC • Current Requirement:
40 to 120m • Audio Alarm:
4 kHz burst • Cable:
9 conductor stranded with continuous shield for typical installation | <ul style="list-style-type: none"> • Operating Temperatures:
-31* to 150* F (-35* to 65*C) • Operating Humidity:
0-95% non-condensing • Weight:
8 oz. (227g) • Color:
Dark gray (standard) & Beige • Output Format:
Wiegand or RS-232 • Certifications:
Complies with FCC Part 15, designed for UL 294 and CE |
|---|---|

Warranty: Lifetime warranty against defects in material and workmanship when installed according to TAC installation instructions.

See complete warranty statement for further details.

Disclaimer: Specifications subject to change without notice. TAC reserves the right to make changes to improve performance without impacting form, fit or function.